


Heavy Construction ATTACHMENTS

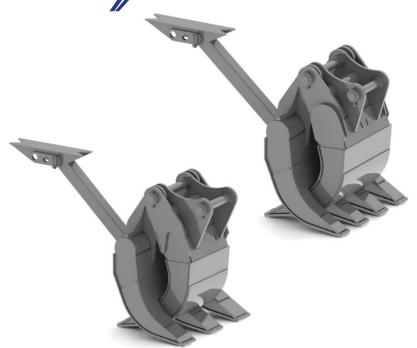

EXGR


Excavator Grapple


*Grapple available in Heavy Duty- 2 over 3 tine or General Purpose - 3 over 4 tine design.


*Grapples are designed to meet machine capacity.

*Use of abrasive resistant steel used on all wear surfaces.

*Movement of lower grapple jaw allows for greater control of materials.







*To aid in mounting, center pins are sleeved to hold grapple together.

Machine Class	Weight LBS	Weight LBS	(A) Upper Jaw Width IN	(B) Lower Jaw Width IN	(C) Closed Height IN	(D) Minimum Opening IN	(E) Maximin Opening IN	Capacity (Approximate)
25	1415	1525	26	37.88	46	7	83	.5 - 1.5
35	2100	2225	31	44.25	53	8	100	2.0 - 4.0
45	3465	3625	34	48.75	59	9	120	2.5 - 4.3
55	3875	4025	37	52.25	62	9	123	2.5 - 4.3
70	4325	4675	39	55.75	65	9	125	3.0 - 5.0
100	5625	5975	45	63.25	71	10	136	5.0 - 7.0